

A method for designing multi-layer sheet-based lightweight funicular structures

Yao LU^{*a}, Thamer ALSALEM^a, Masoud AKBARZADEH^{a,b}

^{*} Polyhedral Structures Laboratory, 3401 Grays Ferry Avel., Philadelphia, PA, USA, 19146
yaolu61@upenn.edu

^a Polyhedral Structures Laboratory, School of Design, University of Pennsylvania, Philadelphia, USA

^b General Robotic, Automation, Sensing and Perception (GRASP) Lab, School of Engineering and Applied Science, University of Pennsylvania, Philadelphia, USA

Abstract

Multi-layer spatial structures usually take considerable external loads with very limited material usage at all scales, and Polyhedral Graphic Statics (PGS) provides a method to design multi-layer funicular polyhedral structures. The structural forms usually materialized as space frames. Our previous research shows that the intrinsic planarity of the polyhedral geometries can be harnessed for efficient fabrication and construction processes using flat-sheet materials. Sheet-based structures are advantageous over the conventional space frame systems because sheets can provide more load paths and constrain the kinematic degrees of freedom of the nodes. Therefore, they can take a wider range of load compared to space frames. Moreover, sheet materials can be fabricated to complex shapes using CNC milling, laser cutting, water jet cutting, and CNC bending techniques. However, not all sheets are necessary as long as the load paths are preserved, and the system does not have kinematic degrees of freedom. To find a reduced set of faces that satisfies the requirements, this paper incorporates and adapts the matrix analysis method to calculate the kinematic degree of freedom of sheet-based structure. Built upon this, an iterative algorithm is devised to help find the reduced set of faces with zero kinematic degree of freedom. To attest the advantage of this method over bar-node construction, a comparative study is carried out using finite element analysis. The result shows that, with the same material usage, the sheet-based system has improved performance than the framework system under a wide range of loading scenarios.

Keywords: polyhedral graphic statics, matrix analysis, sheet-based structure, form-finding, funicular structure, structural optimization

1. Introduction

Space frames, featured as lightweight and efficient, has been commonly practiced as a structural form for creating long-span or cantilever structures. The recent development of three-dimensional graphic statics using polyhedral reciprocal diagrams, usually referred to as polyhedral graphic statics (PGS), provides an approach to designing complex and multi-layer 3D funicular frameworks while being aware of the internal force distribution [1]. The dimensions of the members can be determined based on their internal forces, which ensures a high structural efficiency under the specific design loads. However, those space frames have certain shortcomings. When the actual loads are different from the design loads, the nodes of the 3D frameworks will likely undergo considerable bending moments, and the safety of the structure relies heavily on the nodal bending resistance. Moreover, when it comes to

complex irregular space frames, the unique geometry of bars and nodes usually lead to a high cost during fabrication and assembly.

It's worth noting that the forms found through PGS have intrinsic planarity that can be harnessed for the design of sheet-based structure systems, which can avoid the issues brought by the space frames. Sheet-based systems have certain advantages over space frames because of their material accessibility, processability, low cost, and applicability to large scales [2]. Sheet materials can be easily processed by various fabrication techniques such as laser cutting, CNC milling, CNC bending, waterjet cutting, etc. In terms of structural performance, a sheet-based system provides more stability and is less vulnerable to various loading scenarios because the forces can be transferred across the faces.

1.1. Background and related work

1.1.1 Graphic statics (GS)

The recent development of 3D graphic statics greatly increased the ease of designing spatial structures. There are two subcategories in the realm of 3D graphic statics using reciprocal diagrams, vector-based [3] and polyhedron-based (PGS) [1], which follow different rules in constructing the form and force 3D dualities. The polyhedron-based approach was initially introduced by Rankine [4] and later developed by Maxwell [5]. Compared to the vector-based method, it guarantees the inherent planarity which can be exploited for sheet-based materialization.

1.1.2 Sheet-based structures designed with polyhedral graphic statics (PGS)

Several research projects investigate the design of sheet-based structures and their materialization approach based on PGS. Akbari et al. introduced a novel method that translates a cellular polyhedral geometry into a polyhedral surface-based manifold structure named shellular structure [12, 13]. The mechanical properties of such structures were studied, and they showed significantly enhanced performance compared to the strut-based cellular structures [14]. A fabrication technique was also proposed based on tucking molecule, a method introduced by Tachi for designing 3D origami [15], and a prototype was made using 0.5mm stainless steel [2]. Akbarzadeh et al. showed the possibility of materializing a 10m- span, modularized glass bridge as a multi-layer system using hollow glass units (HGU) made of 1cm glass sheets [16]. Yost, et al. physically tested the behaviors of one single HGU constructed with 3M™ Very High Bond (VHB) tape as bonding material [17], and the results show that HGU has a significant amount of load-bearing capacity. Aiming to address the challenges of the large-scale construction using HGU regarding detail developments, fabrication constraints, and assembly logic, Lu et al. presented the design and fabrication of a 3m long double-layer glass bridge prototype [18, 19].

1.1.3 Matrix analysis on the kinematics of structures

The matrix analysis methods have been created and developed since the 1930s for structural evaluation purposes. For the analysis of frames using the classic forces method, the non-matrix approach initiated by Maxwell [6] has been routinely taught to aerospace, civil, and mechanical engineering students and offers a substantial scope of ingenuity to experienced engineers through a clever selection of redundant force systems [7]. A matrix analysis framework was then found convenient in organizing those calculations. With a focus on pin-jointed frameworks, Pellegrino and Calladine [8] formulated an algorithm that evaluates the performance of the framework rapidly by determining the rank of the kinematic matrix and the bases of its four linear-algebraic vector subspaces. Specifically, it offers complete details of any states of inextensional deformation that a framework may possess. For the face and hinge system, matrix analysis is also used in the folding

simulation of rigid origami, where the loops of bars can be represented as rigid faces, and the bars can be treated as hinges. The idea of representing triangulated origami as a pin-jointed framework was first proposed by Schenk and Guest [9]. Filipov et al. [10] improved this method with new triangulation schemes for quadrilateral facets. [11] further generalized the triangulation schemes for any n-gons.

1.2. Problem statements and objectives

As shown above, sheet-based structures made through PGS are advantageous because sheet elements constrain the nodal kinematic degrees of freedom and provide more load paths. However, not all sheet elements in the form generated through PGS are necessary as long as the load paths are preserved, and the system does not have kinematic degrees of freedom. By removing redundant sheets, the material cost can be reduced, and the structural efficiency can be further improved.

The design principle is inspired by trusses, where the beam members are connected in a way that they are geometrically locked. Therefore, when a truss is loaded, the forces are mostly transferred through the axial directions of the beam members without needing the nodal bending resistance. Similarly, for a sheet-based system, this geometric “locking” effect is also desired such that its load-bearing capacity does not rely much on the edge bending resistance. In more technical terms, this “locking” effect can be described as a zero kinematic degree of freedom, meaning that there is no possible mechanism in the structure. In order to know whether a structure is kinematically determinate or indeterminate, the matrix analysis method is incorporated for kinematic analysis. Matrix analysis has been used to analyze pin-jointed inextensional frameworks. In this paper, it is adapted for the analysis of rigid face and frictionless hinge systems because a rigid face can be simulated by a cluster of kinematically determinate pin-jointed bars. The performance of this face-hinge system is a good indicator of the performance of a real engineering structure constructed with rigidly connected sheet materials. A zero kinematic degree of freedom imply a structure with more stability and better performances. This adapted matrix analysis approach is then incorporated into a computational pipeline to help find the least faces needed to construct a kinematically determinate face-hinge structure (Figure 1).



Figure 1: A small scale physical model made of Bristol paper.

1.3. Contributions

Based on PGS, this paper introduces a method for designing sheet-based funicular structures that are featured as lightweight and multi-layer. There are several main contributions: first, it provides a new

manner of utilizing PGS for designing efficient sheet-based structures; second, it adapts the matrix analysis method for the kinematic analysis of face and hinge structural system; finally, a computational pipeline is created as a tool that can be exploited by designers.

2. Method

This section is organized into three parts. First, the base geometry is generated using PGS. Next, the matrix analysis method is adapted for the kinematic analysis of sheet-based structures. This is then incorporated into a computational workflow that helps determine the least number of faces needed to keep the kinematic stability and load paths.

2.1. Base geometry preparation: form-finding through polyhedral graphic statics

The workflow starts with form-finding using PGS. In this section, a single-layer funicular shell is used as an example for the explanation and demonstration of the design principles (Figure 2). As mentioned earlier, the intrinsic planarity allows the form to be delivered in a faceted shell in addition to a space frame (Figure 2d). The goal is to find an efficient set of faces that does not have any mechanisms while maintaining the structural form, i.e., keeping all the load paths. Not all faces in the original faceted shell are needed to achieve the kinematic determinacy, hence a computational pipeline is devised to help find a reduced set of faces that satisfy the requirements.

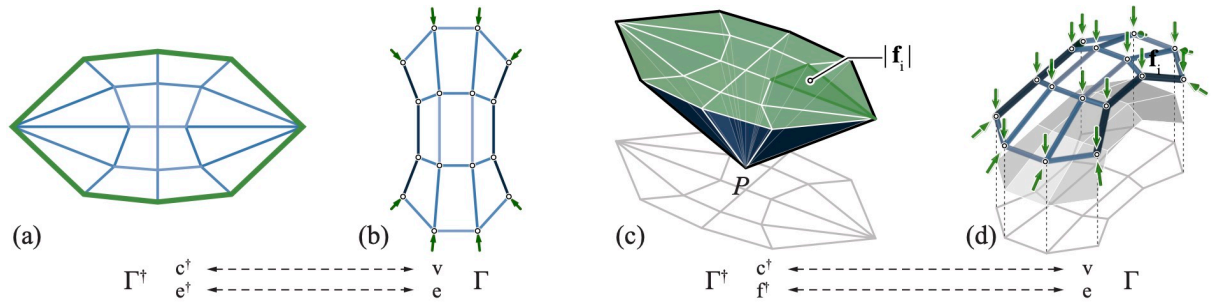


Figure 2: Form-finding of a single-layer funicular shell.

2.2. Matrix analysis method and its adaptation

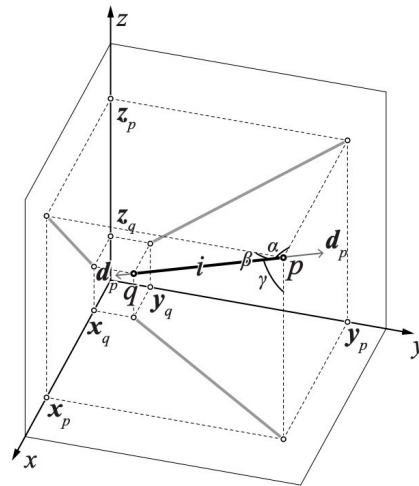


Figure 3: An example edge and the geometric attributes describing nodal displacement and edge elongation.

Before diving into the details of the computational pipeline, the matrix analysis method for pin-jointed inextensional framework and its adapted method for face-and-hinge structures, a part that the pipeline heavily relies on, are explained first. The framework is taken as a starting geometry and analyzed as a pin-jointed inextensional framework following the method formulated by Pellegrino and Calladine [8]. The kinematic analysis starts from the assembly of the kinematic matrix. The form can be depicted with 3 characteristics: v vertices connected by e edges and by k kinematic constraints (defined as one constrained degree of freedom) to a rigid foundation. There are also two sets of kinematic variables to be considered: the elongation δ_i for each edge i , and the displacements d_{jx}, d_{jy}, d_{jz} along X, Y, Z axes in 3D Euclidean space for each vertex j . Their relationship (illustrated in Figure 3) can be written as

$$\delta_i \times l_i = (x_p - x_q)d_{px} + (y_p - y_q)d_{py} + (z_p - z_q)d_{pz} - (x_p - x_q)d_{qx} - (y_p - y_q)d_{qy} - (z_p - z_q)d_{qz} \quad (1)$$

where l_i is the length of edge i . Assemble all equations for e edges in matrix form as

$$\begin{pmatrix} \delta_1 \times l_1 \\ \vdots \\ \delta_i \times l_i \\ \vdots \\ \delta_e \times l_e \end{pmatrix} = \begin{pmatrix} \cdots & \vdots & \vdots & \vdots & \cdots & \vdots & \vdots & \vdots & \cdots \\ \cdots & x_p - x_q & y_p - y_q & z_p - z_q & \cdots & x_q - x_p & y_q - y_p & z_q - z_p & \cdots \\ \cdots & \vdots & \vdots & \vdots & \cdots & \vdots & \vdots & \vdots & \cdots \end{pmatrix} \cdot \begin{pmatrix} \vdots \\ d_{px} \\ d_{py} \\ d_{pz} \\ \vdots \\ d_{qx} \\ d_{qy} \\ d_{qz} \\ \vdots \end{pmatrix} \quad (2)$$

this may also be written as

$$\Delta = \mathbf{A} \cdot \mathbf{d} \quad (3)$$

where \mathbf{A} is the e by $3v-k$ kinematic matrix, \mathbf{d} is the vector of $3v-k$ displacements, and Δ is the vector of e elongation coefficients, each defined as $\delta_i \times l_i$. The kinematic indeterminacy m , meaning the number of independent mechanisms, can then be determined by the relationship between the numbers of equations and unknowns, where an important concept of rank r_A comes into play:

$$m = 3v - k - r_A \quad (4)$$

It's important to note that, as stated by Pellegrino, the kinematic indeterminacy here may include the rigid body motion of the framework. In other words, when not constrained to any foundation, a framework will at least have 6 kinematic indeterminacy, 3 translational and 3 rotational. In the scope of this paper, the rigid body motions are named as external kinematic indeterminacy m_{ex} , and the mechanisms at the vertices are named as internal kinematic indeterminacy m_{in} . They satisfy the equation

$$m = m_{ex} + m_{in} \quad (5)$$

When detecting the internal mechanisms of the structure, the external indeterminacy m_{ex} should be excluded. The calculation of m_{ex} is based on the k kinematic constraints to the rigid foundation and is omitted here. In the scope of the paper, all examples are set up with adequate kinematic constraints to the rigid foundation such that m_{ex} is zero. For the example geometry, there are 24 bars, 12 unconstrained joints, and 4 other joints set up as fully constrained (Figure 4a). The rank of the kinematic matrix is calculated to be 12, therefore the internal kinematic indeterminacy is 12 given no rigid body motion is possible, indicating that the framework has 12 internal independent mechanisms.

However, the locations of the mechanisms are still unknown. This issue can be resolved by solving for the vertices that have potential displacements. Since the edges in the framework can be assumed rigid, there is no elongation in the structure, hence Eq.3 can be replaced by

$$\mathbf{0} = \mathbf{A} \cdot \mathbf{d} \quad (6)$$

The potential displacements of the vertices can be obtained by solving \mathbf{d} , which is equivalent to solving for the null space of \mathbf{A} . With scipy [20], the 36 by 12 orthonormal basis of the null space can be computed through single value decomposition. The linear combination of the 12 columns represents the possible infinitesimal displacements of the unconstrained vertices when the external forces cannot be balanced. For the unmovable unconstrained vertices, its displacements are zero under any linear combinations. Some randomly selected exaggerated displacement scenarios are visualized in Figure 4. Thereupon the locations of the mechanisms are found. As a side note, each displacement scenario is caused by a corresponding set of external loads, the magnitudes and directions of the loads are not discussed in this paper.

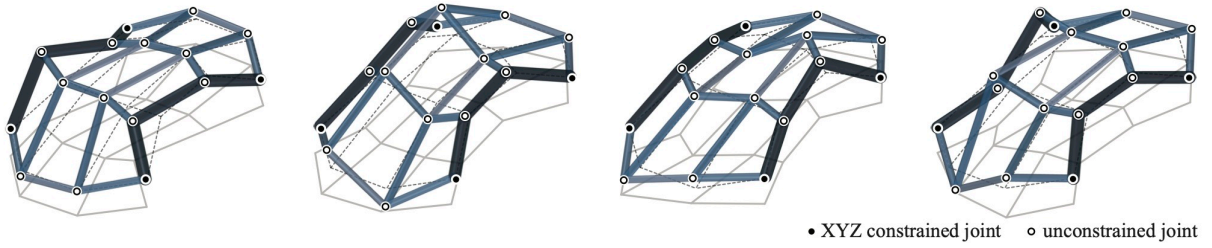


Figure 4: The exaggerated infinitesimal deformation representation of the framework.

When the structure is built with rigid faces, some extra planar constraints are added to the loop of edges and vertices of each face. Those constraints can be implemented using helper edges and vertices for the “stiffening” effect of the faces. The edges related to each face need to form a rigid body such that the resulted new pin-jointed framework performs like a face-hinge structure (Figure 5).

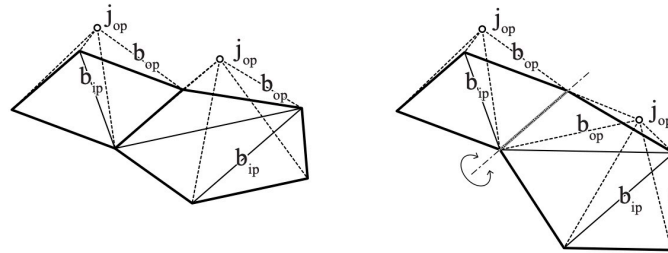


Figure 5: Pin-jointed framework performs like a face-hinge structure.

The mathematical relationship between the number of required helper edges and the number of polygonal face sides is then established following a method proposed by Zhang et al. [11]. As exploited by [9], a triangular framework can be directly used for the folding simulation of triangular origami without any helper edges and vertices. For any side count that is larger than 3, helper edges and vertices are needed (Figure 6). Later, the kinematic indeterminacy and locations of mechanisms can be determined for the framework with certain rigid faces. As illustrated in Figure 7, the kinematic indeterminacy of the pin-jointed framework is suppressed with an increasing number of rigid faces, and the framework becomes kinematically stable after 7 rigid faces are added.

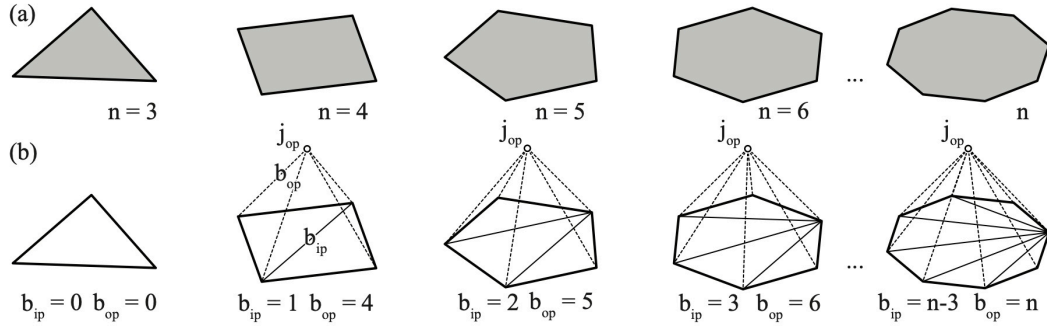


Figure 6: Add helper edges and vertices to simulate rigid faces.

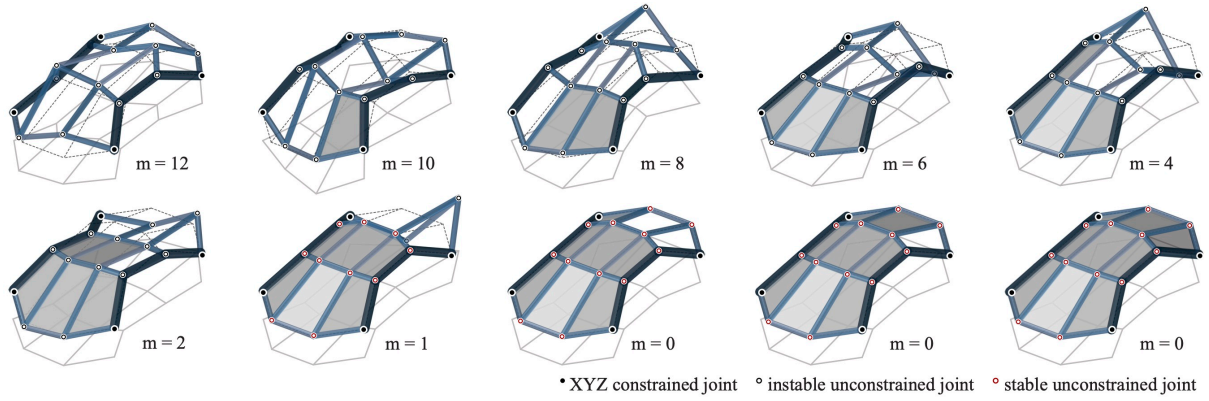


Figure 7: Add helper edges and vertices to simulate rigid faces.

2.3. Algorithmic design

After establishing the analysis method that is compatible with rigid faces, an iterative algorithm is then devised to help determine the least number of faces needed to keep the kinematic stability and load paths. In each iteration, one rigid face is added to the framework, and it stops when the internal kinematic indeterminacy becomes zero. Figure 7 shows the decreased kinematic indeterminacy with more faces added to the framework. Notably, the sequence of adding rigid faces significantly affects the result of this algorithm. For example, Figure 8a to 8d show 4 cases of adding 7 rigid faces, in which 3 become stable while 1 is still kinematically unstable. Besides, since the goal is to use sheet material only for the construction of the structure, naked edges cannot exist in the final structure. In other words, the faces need to include all edges in the framework (Figure 8e). To obtain the least number of faces and therefore achieve higher structural efficiency, the sequence of adding rigid faces needs careful consideration. The design of the computational pipeline is illustrated in Figure 9a.

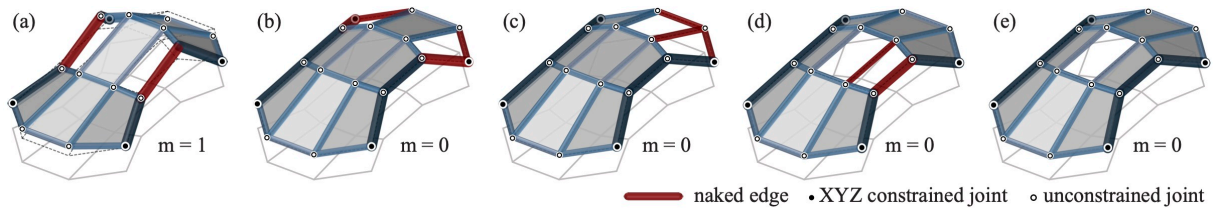


Figure 8: (a)-(d) Kinematic indeterminacies on different sets of 7 faces, (e) the solution without naked edges.

The algorithm starts with the input of polyhedral geometry, including all vertices v_i , edges e_i , and faces f_i . The vertices and edges are used to construct the initial framework, and the faces are the candidates to be added. Next, the constraints are set, and the initial m_{in} of the framework is calculated. There is no face stiffened at this point. To help determine the sequence for adding faces, the concept of priority is introduced, where a larger priority means a face will be added first. For each face, its priority pr is calculated based on its area a , the number of neighbor faces f_n , and the number of single-valence edges e_f it has. A larger area leads to a smaller priority because less area means less material and hence higher efficiency. More neighbor faces lead to a larger priority because it tends to reduce more degrees of kinematic indeterminacy. In the case of sheet-only systems, any face with an edge of single-valence, meaning that the edge only belongs to one face candidate, has an infinite priority since it is required to keep the load paths. Based on the description above, the priority function can be formulated as

$$pr = \begin{cases} \infty & e_f > 0 \\ x(1 - a) + yf_n & e_f = 0 \end{cases} \quad (7)$$

where a is the face area mapped to range 0-1; x and y are coefficients that can be adjusted to tune the weights of a and f_n . Also, this pipeline allows design decisions to be incorporated into the priority function. If certain face candidates are required due to the functionality of the structure, its priority will be overwritten to positive infinite. Contrarily, if any face candidate is unwanted, its priority will be overwritten to zero. After, the priorities of all face candidates are calculated, and the faces are sorted with descending priority. Then, faces are iteratively added to the framework. In each iteration, the face with the highest priority is popped from the list of candidates and “stiffened”. The stiffening is realized by adding helper vertices according to the rule described above in Figure 6. This is then followed by calculating the new m_{in} with all helper vertices and edges. If m_{in} stays the same compared to the last iteration, meaning that this newly added face doesn’t help constrain the mechanisms, it will “unstiffened” by removing the corresponding helper vertex and edges. This process repeats until m_{in} becomes zero. The final step is to add additional faces in order to eliminate the naked edges and vertex-to-vertex connections (see section 3.1 for more details) since the structure is designed to be built with sheet-based material only and the original load paths need to be maintained. As a result, the output faces form a kinematically stable face-hinge structure.

3. Case study

In this section, the method outlined above is used to design a bridge to attest the proposed method. A comparative study is carried out using finite element analysis (FEA). A small-scale physical model is also made to explore the connection details between the sheets.

3.1. Base geometry and generation process

The form and force diagrams generated using PGS are shown in Figure 9b, c. 10kN is used as the total design load applied on the top of the structure, and the total span is set to 3m. The face-adding process begins after having the base framework geometry. Eight vertices are first chosen as pin anchors to support the structure (Figure 9c). No faces are added at this point. Due to its functionality as a bridge, 31 top faces are determined as must-haves for people to walk on. Later, the iterative face-adding algorithm is invoked which finds the additional faces with the least area that reduce the internal kinematic indeterminacy to zero, meaning that there is no mechanism across the structure (Figure 9d). Next, a secondary iterative algorithm is needed to add the minimal set of faces such that all edges are the one boundary edge of at least one attaching face (Figure 9e). The resulted structure may have vertex-to-vertex connections between adjacent faces as illustrated in Figure 9e, which raises problems

for materialization. Therefore, one further action is taken to add additional faces that help eliminate those vertex-to-vertex connections. The final structure is shown in Figure 9f.

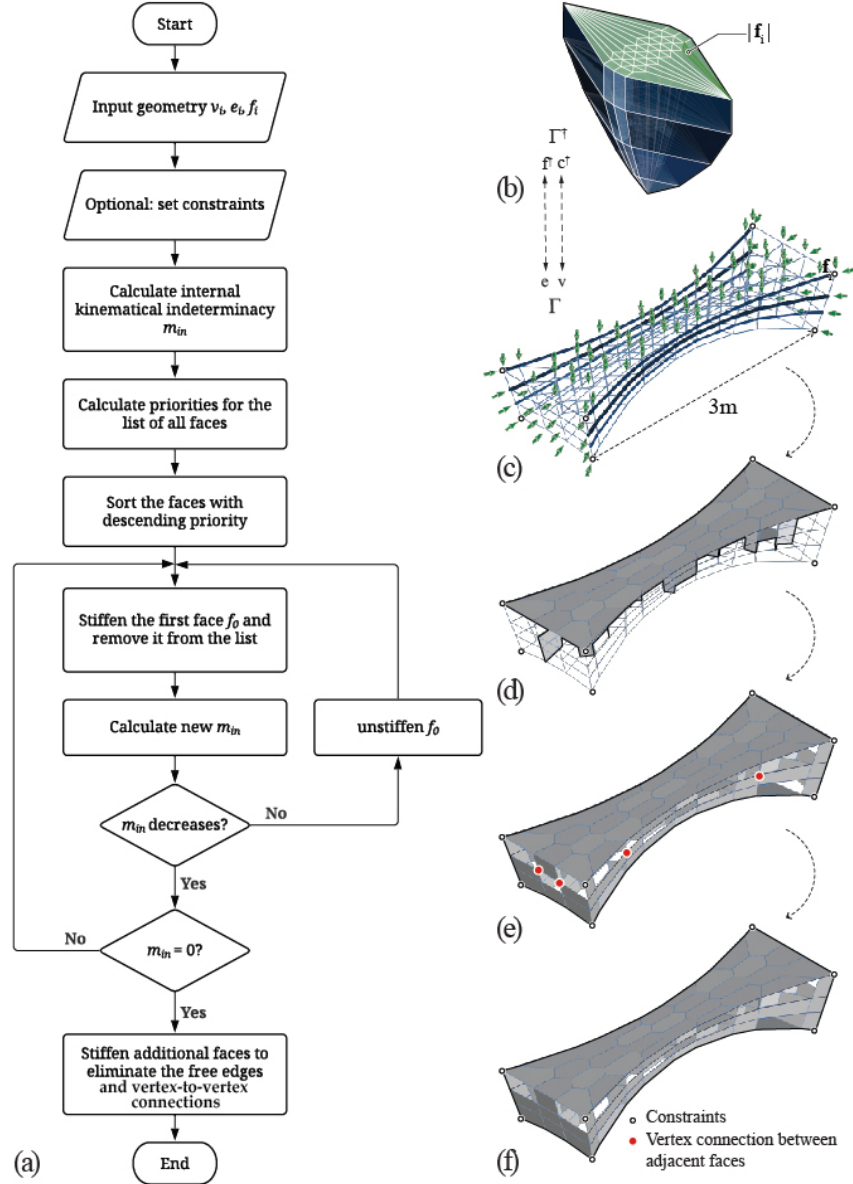


Figure 9: The computational flowchart for determining the faces needed to stabilize the framework.

3.2. Comparative numerical study

To further understand the mechanical performance of the design, a comparative numerical study is carried out on both the sheet-based structure and space frame using the Finite Element Method (FEM). Structural steel is used as the material, and the total material usage is controlled at $66.5kg$ for both structures. The structures are simply supported on the vertices of two ends of the bridge, and they are simulated under two static loading scenarios: first under the design load of $10kN$ distributed on the top vertices (Figure 10a, b), then under a point load of $3kN$ (Figure 10c, d). For the first loading scenario, both structures reported a max displacement below $0.8mm$, and the space frame slightly outperforms

the sheet-based structure. For the second loading scenario, the max displacement of the sheet-based structure remains at a low level. However, the space frame reports that of more than 45mm , indicating a risk of buckling. The result shows that although the sheet-based structure performs slightly worse than the space frame under the design loads, it's potentially more versatile in taking a wider range of loads in real-world applications.

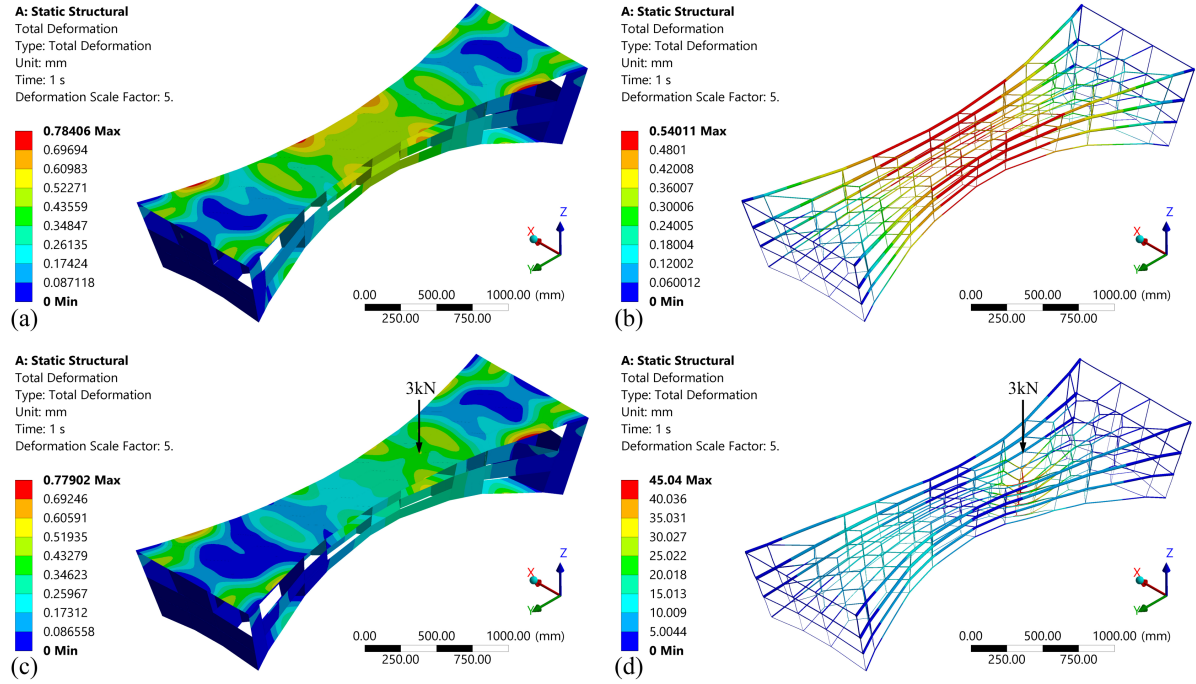


Figure 10: Comparative study with FEA on the sheet-based and framework structures under two load cases.

3.3. Small-scale physical model

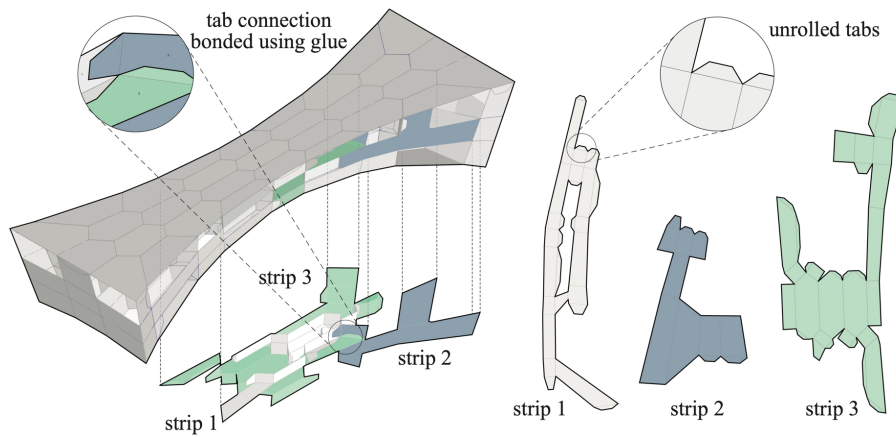


Figure 11: Strips and tabs facilitate the fabrication and assembly of the model.

A 1:6 physical model spanning 0.5m is made using Bristol paper. For a complex non-manifold geometry like this, two techniques are used to facilitate the fabrication and assembly. First, the total 283 faces are merged into 35 continuous strips and unrolled onto flat sheets such that they can be

laser-cut and assembled with fewer parts. Second, all edge connections are realized by small overlaps (tabs) bonded with glue (Figure 11). The model can take 2.3kg of load with a span of 0.5m and a self-weight of 110g, manifesting minor deflections (Figure 12).

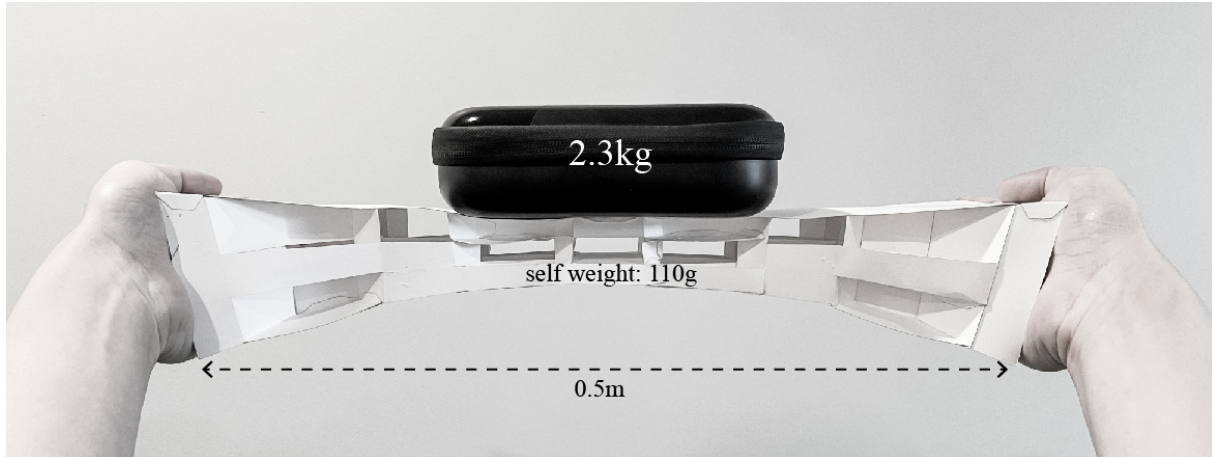


Figure 12: A simple physical load test on the small-scale model made of Bristol paper.

4. Conclusion and future work

This paper presents a novel workflow that adapts and combines the matrix analysis method with polyhedral graphic statics to facilitate the design of multi-layer sheet-based lightweight funicular structures with the minimum cost of sheet materials. The numerical simulation and physical small-scale prototype both show that this system can achieve considerable load-bearing capacity with limited material cost. Some materialization strategies are also explored through the physical model. In future steps, the buckling issue of thin sheet materials will be considered in the computational pipeline, and a variety of multi-layer forms will be designed and studied using more comprehensive numerical simulations. Moreover, a larger scale prototype will be constructed and tested to gain further understanding of its real-world performance.

References

- [1] M. Akbarzadeh, 3D Graphical Statics Using Reciprocal Polyhedral Diagrams. PhD thesis, ETH Zurich, 2016.
- [2] M. Akbari, Y. Lu, and M. Akbarzadeh, “From design to the fabrication of shellular funicular structures,” in *Proceedings of the Association for Computer-Aided Design in Architecture (ACADIA)*, 2021.
- [3] P. D’Acunto, J.-P. Jasienski, P. O. Ohlbrock, C. Fivet, J. Schwartz, and D. Zastavni, “Vector-based 3D graphic statics: A framework for the design of spatial structures based on the relation between form and forces,” *International Journal of Solids and Structures*, vol. 167, pp. 58–70, Aug. 2019.
- [4] W. Rankine, “Principle of the Equilibrium of Polyhedral Frames,” *Philosophical Magazine Series 4*, vol. 27, no. 180, p. 92, 1864.
- [5] J. C. Maxwell, “I.—On Reciprocal Figures, Frames, and Diagrams of Forces,” *Earth and Environmental Science Transactions of The Royal Society of Edinburgh*, vol. 26, no. 1, pp. 1–40, 1870. Publisher: Royal Society of Edinburgh Scotland Foundation.

- [6] J. C. Maxwell, "L. On the calculation of the equilibrium and stiffness of frames," *The London, Edinburgh, and Dublin Philosophical Magazine and Journal of Science*, vol. 27, pp. 294–299, Apr. 1864. Publisher: Taylor & Francis eprint: <https://doi.org/10.1080/14786446408643668>.
- [7] C. A. Felippa, "A historical outline of matrix structural analysis: a play in three acts," *Computers & Structures*, vol. 79, pp. 1313–1324, June 2001.
- [8] S. Pellegrino and C. R. Calladine, "Matrix analysis of statically and kinematically indeterminate frameworks," *International Journal of Solids and Structures*, vol. 22, pp. 409–428, Jan. 1986.
- [9] M. Schenk and S. D. Guest, "Origami Folding: A Structural Engineering Approach," p. 16, 2010.
- [10] E. T. Filipov, K. Liu, T. Tachi, M. Schenk, and G. H. Paulino, "Bar and hinge models for scalable analysis of origami," *International Journal of Solids and Structures*, vol. 124, pp. 26–45, Oct. 2017.
- [11] T. Zhang, K. Kawaguchi, and M. Wu, "A folding analysis method for origami based on the frame with kinematic indeterminacy," *International Journal of Mechanical Sciences*, vol. 146–147, pp. 234–248, Oct. 2018.
- [12] M. Akbari, M. Akbarzadeh, and M. Bolhassani, "From polyhedral to anticlastic funicular spatial structures," in *Proceedings of IASS Symposium*, 2019.
- [13] M. Akbari, A. Mirabolghasemi, H. Akbarzadeh, and M. Akbarzadeh, "Geometry-based structural form-finding to design architected cellular solids," in *Symposium on Computational Fabrication, SCF '20*, (New York, NY, USA), p. 1–11, Association for Computing Machinery, Nov 2020.
- [14] M. Akbari, A. Mirabolghasemi, M. Bolhassani, A. Akbarzadeh, and M. Akbarzadeh, "Strut-based cellular to shellular funicular materials," *Advanced Functional Materials*, vol. 32, no. 14, p. 2109725, 2022.
- [15] T. Tachi, "3d origami design based on tucking molecule," *Origami*, vol. 4, pp. 259–272, 2009.
- [16] M. Akbarzadeh, M. Bolhassani, A. Nejur, J. R. Yost, C. Byrnes, J. Schneider, U. Knaack, and C. B. Costanzi, "The Design of an Ultra-Transparent Funicular Glass Structure," pp. 405–413, Apr. 2019. Publisher: American Society of Civil Engineers.
- [17] J. R. Yost, M. Bolhassani, P. A. Chhadeh, L. Ryan, J. Schneider, and M. Akbarzadeh, "Mechanical performance of polyhedral hollow glass units under compression," *Engineering Structures*, vol. 254, pp. 113–730, 2022.
- [18] Y. Lu, M. Cregan, P. A. Chhadeh, A. Seyedahmadian, M. Bolhassani, J. Schneider, J. R. Yost, and M. Akbarzadeh, "All glass, compression-dominant polyhedral bridge prototype: form-finding and fabrication," in *Proceedings of IASS Symposium and Spatial Structures Conference 2020/21, Inspiring the next generation*, (Guildford, UK), August 23–27 2021.
- [19] Y. Lu, A. Seyedahmadian, P. A. Chhadeh, M. Cregan, M. Bolhassani, J. Schneider, J. R. Yost, G. Brennan, and M. Akbarzadeh, "Funicular glass bridge prototype: design optimization, fabrication, and assembly challenges," *Glass Structures Engineering*, vol. 8, pp. 261–272, 2022.
- [20] P. Virtanen, R. Gommers, T. E. Oliphant, M. Haberland, T. Reddy, D. Cournapeau, E. Burovski, P. Peterson, W. Weckesser, J. Bright, S. J. van der Walt, M. Brett, J. Wilson, K. J. Millman, N. May- orov, A. R. J. Nelson, E. Jones, R. Kern, E. Larson, C. J. Carey, I. Polat, Y. Feng, E. W. Moore, J. VanderPlas, D. Laxalde, J. Perktold, R. Cimrman, I. Henriksen, E. A. Quintero, C. R. Har- ris, A. M. Archibald, A. H. Ribeiro, F. Pedregosa, P. van Mulbregt, and SciPy 1.0 Contributors, "SciPy 1.0: Fundamental Algorithms for Scientific Computing in Python," *Nature Methods*, vol. 17, pp. 261–272, 2020.